



Mobile Power

NEW! The Mobile Powerbank is a rechargeable battery that provides mobility of usage, design and function to office furniture. The corresponding docking bay enables the possibility of easy installation and exchange. Charging is performed by using the Micro USB Charger.


FEATURES:

- Charging with Micro USB charger
- Only compatible with SMARTneo-pro
- Docking bay for easy mounting and exchange
- LEDbar and buzzer for indicating status






Art. No.	Product
232635	Mobile Power Startkit - including Powerbank, Docking bay, Charger

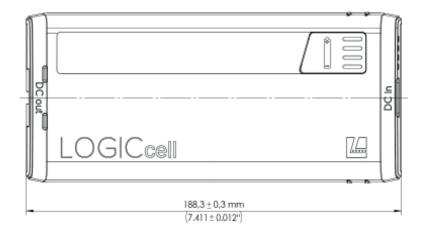





Technical data

Rated output current	10 A
Rated output voltage	25.2 VDC
Rated. input current	2.4 A
Max. input voltage	5 VDC
Service life*	500 cycles
Dimensions (l x w x h)	188.3 x 85.4 x 34.2 mm
Weight	527.9 g
Standby	Up to 4 weeks
Performance of a charged battery	1-column frame: about 60 times full stroke 2-column frame: about 35 times full stroke
Interface / connector types	Micro USB type-B
Ambient conditions during operation	+5 °C to +40 °C at 10 % to 85 % relative humidity (non-condensing), with +27 °C max. dew point
Ambient conditions during transport and storage	-20 °C to +60 °C at 5 % to 85 % relative humidity (non-condensing), with +38 °C max. dew point; temperatures from +55 °C to +76 °C only for short periods, not exceeding 24 h
Compatibility	SMARTneo-pro
Degree of protection	IP 20
Standards and regulations	EMC directive 2014/30/EU RoHS directive 2011/65/EU REACH Regulation (EC) No 1907/ 2006 WEEE directive 2012/19/EU Batteries directive 2006/66/EC AfPS GS:2014:01 California proposition 65 Dodd Frank Act UL 2054 UN-T 38.3
Used cells	Li-Ion battery INR18650 M26
Capacity	2.6 Ah

* Capacity at the end of the service life is max. 70% of initial value

Swedstyle AB

Box 171 SE-567 30 Vaggeryd, Sweden info@swedstyle.se +46 393-363 60 www.swedstyle.com

